



诗兰姆 标准件 Schlemmer Standard Parts

2023



乘用车
Passenger vehicle



商用车
Commercial vehicle



工程机械
Engineering machinery




机械制造
Machine manufacturing



白色家电
Appliances

Arrow Cable Ties

个字头扎带

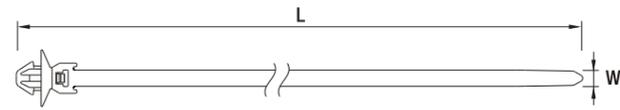

- The disc feature makes adjustable the pressure at different directions of the cable tie and blocks dirt and foreign materials
伞型帽设计可调节扎带各个方向的压力，减少灰尘杂物进入
- The arrow-like round clip is designed for some types to shorten the installation height to avoid interference
部分款式圆形个字头设计可缩小安装高度，避免干涉
- The arrow clip is easy to insert and performs large retention force
个字头结构，轻松插入且保持力强
- The arrow clip after installation could be disassembled completely and reused
个字头安装后可完整拆卸，二次使用




- The design of the rear of the band is improved, easy for self-assembly
扎带尾部优化设计，易于自身装配
- The internal teeth are designed to tie up the harness more securely
内齿型设计，线束捆绑更牢固
- The external teeth are designed to make contact surface more smooth
外齿形设计，接触面更平滑
- Assembly is done manually or with a cable tie gun, operationally easy
(The best is to keep 2 teeth of the band)
手动或使用扎带枪装配，操作方便
(带部保留两齿为最佳)

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度 mm	Applicable harness 捆扎范围 mm	Length 长度 mm	Width 宽度 mm	Temperature rating 温度等级 °C	Int. /ext. Teeth 齿	Colour 颜色
	9920000	Φ4.6~4.8	0.8~3.0	Φ1.0~35	156	3.4	125	Ext.	Black
	9920001	Φ4.6~4.8	0.8~3.0	Φ1.0~45	211	4.6	125	Ext.	Black
	9818115	Φ6.0~6.5	0.7~2.0	Φ4.0~45	202	4.7	85	Int.	Black
	9818087	Φ6.1~6.5	0.8~2.5	Φ2.0~25	135	4.7	125	Int.	Black
	9818119	Φ6.1~6.5	0.8~2.5	Φ2.0~25	135	3.6	85	Int.	Natural
	9814119	Φ6.3~6.7	2.5~3.0	Φ 22 max	164	4.6	85	Ext.	Black
	9814006	Φ6.5	1.0~3.0	Φ1.0~15	156	3.4	125	Ext.	Black
	9814002	Φ6.5	0.8~1.8	Φ1.0~15	154	3.4	125	Ext.	Black
	9818089	Φ6.5+0.2	2.5~4.0	Φ3.0~28	119	4.5	125	Int.	Black
	9814096	Φ6.5+0.2	0.6~1.8	Φ1.5~30	159	4.6	125	Ext.	Green
	9818202	Φ6.9±0.6	1.2±0.6	Φ1.5~31	160	5.0	85	Ext.	Black
	9818116	Φ7.0±0.1	3.5	Φ3.0~50	219	7.4	125	Ext.	Black
	9818093	Φ7.0±0.2	0.7~1.4	Φ3.0~28	154	6.4	85	Ext.	Black
	9818085	Φ7.0-0.2	0.7~1.4	Φ4.5~35	172	5.0	85	Ext.	Gray
	9818738	Φ7.0-0.2	1.2~2.0	Φ4.5~35	171	5.2	85	Ext.	Black
	9920004	Φ7.8~8.5	0.8~2.3	Φ1.0~35	159	3.4	125	Ext.	Black
	9920005	Φ7.8~8.5	0.8~2.3	Φ1.0~45	214	4.6	125	Ext.	Black
	9920006	Φ8.8~9.5	0.8~2.3	Φ1.0~35	159	3.4	125	Ext.	Black
	9920007	Φ8.8~9.5	0.8~2.3	Φ1.0~45	214	4.6	125	Ext.	Black
	9818123	Φ10.0	1.2	Φ2.0~30	152	4.5	85	Ext.	Black

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度 mm	Applicable harness 捆扎范围 mm	Length 长度 mm	Width 宽度 mm	Temperature rating 温度等级 °C	Int. /ext. Teeth 齿	Colour 颜色
	9920003	Φ5.2~5.6	0.7~1.3	Φ1.0~45	208	4.6	125	Ext.	Black
	9814013	Φ6.5	0.8~1.8	Φ1.0~15	153	3.4	125	Ext.	Black
	9814128	Φ6.5+0.2	0.7~1.3	Φ1.0~30	157	4.6	125	Ext.	Black
	9920002	Φ5.2~5.6	0.7~1.3	Φ1.0~35	153	3.4	125	Ext.	Black
	9818748	Φ6.0±0.2	0.8~2.0	Φ3.0~20	170	5.9	85	Ext.	Black
	9818112	Φ7.0±0.2	0.6~3.0	Φ4.0~35	163	8.0	85	Ext.	Black
	9818127	Φ7.0	0.6~0.8	Φ2.0~25	127	5.6	85	Ext.	Gray
	9818109	Φ7.0±0.1	0.8~0.9	Φ2.0~25	125	5.6	85	Ext.	Gray
	9814124	Φ6.3~6.7	0.6~1.8	Φ22 max	164	4.6	85	Ext.	Black
	9814139	Φ6.5	1.0~1.8	Φ1.0~15	154	3.4	125	Ext.	Black
	9814126	Φ6.5+0.2	0.6~1.8	Φ1.5~30	159	4.6	125	Ext.	Green
	9818081	Φ6.5±0.2	2.5~3.5	Φ3.0~45	200	4.6	85	Ext.	Black
	9814154	Φ6.5±0.2	2.5~3.5	Φ3.0~35	145	3.4	85	Ext.	Black
	9814104	Φ20.0~20.5	1.8	Φ4.0~45	200	4.6	125	Ext.	Black

Fir Tree Cable Ties

杉树头扎带



- The disc feature makes adjustable the pressure at different directions of the cable tie and blocks dirt.
圆盘设计可调节扎带各个方向的压力，有效减少灰尘进入
- A short fir tree clip is designed for some types to lower the installation height to avoid interference.
部分款式杉树头高度低矮为缩小安装高度，避免干涉
- The fir tree configuration is designed for easy lock, prevention from improper assembly, and better anti-dropping capability.
杉树头设计，轻松锁紧并防止装配不到位，防脱落能力更强
- The fir tree design is helpful to fit with a wider range of the panel thickness.
杉树头设计有助于匹配更大范围的钣金厚度
- The design of the rear of the band is improved, easy for self-assembly.
扎带尾部优化设计，易于自身装配


- It is recyclable as made of quality nylon materials
由优质尼龙材料制成，可回收利用
- The internal teeth are designed to tie up the harness more securely.
内齿型设计，线束捆绑更牢固
- The external teeth are designed to make contact surface more smooth.
外齿形设计，接触面更平滑
- Assembly is done manually or with a cable tie gun, operationally easy
(The best is to keep 2 teeth of the band).
手动或使用扎带枪装配，操作方便
(带部保留两齿为最佳)

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度 mm	Applicable harness 捆扎范围 mm	Length 长度 mm	Width 宽度 mm	Temperature rating 温度等级 °C	Int. /ext. Teeth 齿	Colour 颜色
	9814125	φ4.5~5.0	0.70~3.0	φ1.0~35	145	3.4	125	Ext.	Black
	9814137	φ6.3~7.0	0.70~7.0	φ3.0~80	380	4.6	125	Ext.	Black
	9818103	φ6.5~7.0	0.90~2.0	φ4.0~45	200	4.6	125	Ext.	Black
	9814155	φ6.5~7.0	0.90~2.0	φ4.0~35	145	3.4	125	Ext.	Black
	9818912	φ6.5~7.0	0.80~7.0	φ1.5~40	200	4.5	125	Ext.	Black
	9818749	φ6.5~7.0	0.75~6.0	φ4.0~49	200	4.6	125	Ext.	Black
	9814156	φ6.5~7.0	0.75~6.0	φ4.0~35	145	3.4	125	Ext.	Black
	9818750	φ6.5~7.0	0.75~3.0	φ1.0~45	200	4.6	125	Ext.	Black
	9818732	φ8.0±0.20	0.80~6.0	φ4.0~45	200	4.7	85	Ext.	Black
	9814093	φ6.5±0.2	0.80~4.0	φ4.0~45	200	4.6	125	Ext.	Black
	9814120	φ6.3~7.0	0.6~4.2	φ1.0~35	161	4.6	125	Ext.	Black
	9818737	φ6.5-0.2	0.8~7.0	φ1.5~31	170	5.0	85	Ext.	Black
	9814122	Hex6.35±0.2 φ6.50±0.4	0.60~8.25	φ1.0~35	169	4.6	125	Ext.	Black
	9818110	φ6.35±0.15	0.6~3.0	φ3.0~36	164	5.4	125	Ext.	Gray
	9814007	φ6.5	0.8~2.0	φ1.0~15	158	3.4	125	Ext.	Black
	9814011	φ6.5	0.6~4.5	φ1.0~15	162	3.4	125	Ext.	Black
	9818101	φ6.5	0.67~3.0	φ4.0~32	156	5.0	85	Ext.	Black
	9814060	φ6.5±0.15	0.8~2.5	φ6.5~32	171	5.8	125	Int.	Black
	9814067	φ6.5±0.4	0.7~4.0	φ1.0~40	190	4.8	125	Int.	Black

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度 mm	Applicable harness 捆扎范围 mm	Length 长度 mm	Width 宽度 mm	Temperature rating 温度等级 °C	Int. /ext. Teeth 齿	Colour 颜色
	9818773	φ6.5~7.0	0.75~3.5	φ8.0~33	163	4.6	125	Int.	Black
	9814111	φ6.5~7.0	0.75~3.5	φ8.0~33	163	4.6	125	Int.	Black
	9818128	φ7.0±0.2	0.8~5.0	φ10.0~40	232	4.6	125	Int.	Black
	9814014	φ8.0	1.0~3.0	φ1.0~15	160	3.4	125	Ext.	Black
	9818774	φ8.0±0.2	0.8~5.0	φ8.0~33	148	4.8	85	Int.	Black
	9814066	φ8.0±0.25	0.7~7.0	φ1.6~45	209	4.8	125	Int.	Black
	9814012	T5/M6 (Thread hole)	14.0	φ1.0~15	162	3.4	125	Ext.	Black
	9814164	M6 (Thread hole)	14.0	φ1.0~45	220	4.6	125	Ext.	Black
	9818126	φ7.0±0.2	1.0	φ3.0~40	180	5.6	85	Int.	Black
	9818125	φ7.95±0.15	0.7~11.7	φ3.0~30	151	6.5	85	Ext.	Natural
	9818125B	φ7.95±0.15	0.7~11.7	φ3.0~30	151	6.5	85	Ext.	Black
	9814004	φ6.5	1.0~6.0	φ1.0~15	164	3.4	125	Ext.	Black
	9814005	φ6.5	0.6~4.5	φ1.0~15	175	3.4	125	Ext.	Black
	9920008	φ3.3~4.0	1.0~4.0	φ1.0~35	157	3.4	125	Ext.	Black
	9920009	φ3.3~4.0	1.0~4.0	φ1.0~45	212	4.6	125	Ext.	Black
	9920010	φ4.3~4.5	0.7~3.0	φ1.0~35	158	3.4	125	Ext.	Black
	9920011	φ4.3~4.5	0.7~3.0	φ1.0~45	213	4.6	125	Ext.	Black
	9920012	φ4.5~5.0	0.7~3.0	φ1.0~35	158	3.4	125	Ext.	Black
	9920013	φ4.5~5.0	0.7~3.0	φ1.0~45	213	4.6	125	Ext.	Black
	9920014	φ5.8~6.2	0.8~3.0	φ1.0~35	158	3.4	125	Ext.	Black
	9920015	φ5.8~6.2	0.8~5.0	φ1.0~35	160	3.4	125	Ext.	Black
	9920016	φ5.8~6.2	0.8~8.0	φ1.0~35	163	3.4	125	Ext.	Black
	9920017	φ5.8~6.2	0.8~3.0	φ1.0~45	213	4.6	125	Ext.	Black
	9920018	φ5.8~6.2	0.8~5.0	φ1.0~45	215	4.6	125	Ext.	Black
	9920019	φ5.8~6.2	0.8~8.0	φ1.0~45	218	4.6	125	Ext.	Black
	9920020	φ8.0~8.2	0.8~3.0	φ1.0~35	159	3.4	125	Ext.	Black
	9920021	φ8.0~8.2	0.8~5.0	φ1.0~35	160	3.4	125	Ext.	Black
	9920022	φ8.0~8.2	0.8~8.0	φ1.0~35	163	3.4	125	Ext.	Black
	9920023	φ8.0~8.2	0.8~3.0	φ1.0~45	214	4.6	125	Ext.	Black
	9920024	φ8.0~8.2	0.8~5.0	φ1.0~45	215	4.6	125	Ext.	Black
	9920025	φ8.0~8.2	0.8~8.0	φ1.0~45	218	4.6	125	Ext.	Black
	9920026	φ8.7~9.2	0.8~4.0	φ1.0~35	162	3.4	125	Ext.	Black

Cable Ties with Tube Clamp

紧固管夹扎带




- It is typically applicable to the places where it is not allowed to bore holes or weld with studs in the engine compartment
多适用于发动机舱无法打孔和焊接螺柱的空间位置
- The C-clamp can fix another harness nearby and keep it distant from the harness tied up by the cable tie of the C-clamp
扎带箍紧线束后，C型管夹可以固定临近线束并保持两者适当距离
- The clamp attached on the cable tie is design to be rotatable 360°, helpful to adjust directions during assembly
后装管夹固定位轴型设计可360°转动，利于装配时方向调整

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度 mm	Applicable harness 捆扎范围 mm	Length 长度 mm	Width 宽度 mm	Temperature rating 温度等级 °C	Int. /ext. Teeth 齿	Colour 颜色
	9814136	Φ6.5~7.5	1.2	Φ4.0~31	150	3.5	125	Int.	Black
	9814165	Φ6.5~7.5	1.3	Φ8.0~33	140	4.5	125	Int.	Black
	9814053	Φ8.0~9.0	1.3	Φ8.0~33	140	4.5	125	Int.	Black
	9818771	Φ9.5~10.5	1.3	Φ8.0~33	140	4.5	85	Int.	Black
	9814138	Φ12.0	1.2	Φ1.6~35	147	3.4	125	Ext.	Black
	9814134	Φ19.0~24.5	1.5	Φ8.0~50	213	4.5	85	Int.	Black
	9818775	Φ25.0~27.0	1.3	Φ8.0~33	140	4.5	85	Int.	Black
	9818084	Φ15.0~16.0	1.3	Φ4.5~35	186	5.0	85	Ext.	Black
	9814069	T5, Φ12.0~15.0	1.3	Φ2.5~41	200	4.5	85	Ext.	Black
	9818746	Φ12.0	1.3	Φ1.0~50	200	4.7	85	Int.	Black
	9814166	Φ10.0~14.0	1.3	Φ8.0~33	140	4.5	125	Int.	Black
	9814167	Φ19.0~24.5	1.3	Φ8.0~33	140	4.5	125	Int.	Black
	9818728	Φ25.0	1.3	Φ8.0~33	140	4.5	85	Int.	Black
	9814168	Φ25.0~31.0	1.3	Φ8.0~33	140	4.5	125	Int.	Black

Cable Ties with Stud Fastener

螺柱卡扎带




- Cable ties with stud fasteners are divided into 2 categories: 1. Self fastening; 2. Fastening after nut assembly at the customer
螺柱卡扎带两大类：1.自身紧固；2.需客户端后装螺母紧固
- A split holder can be pre-assembled on the cable tie
分体式设计固定件可预先安装
- The holder is movable on the cable tie after harness assembly, convenient for re-adjustment
与线束捆绑后固定件可在扎带上移动，方便二次调整
- The side, top, offset distances and the like are optional corresponding to the place to set the harness
根据线束放置需求，有侧边，置顶，偏置距离等选择
- The fasteners are either round or oblong; the round one is zero-allowance assembly, while the oblong has assembly allowance
固定件分为圆型&腰型设计，圆型设计无装配余量；腰型设计有装配余量

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度 mm	Applicable harness 捆扎范围 mm	Length 长度 mm	Width 宽度 mm	Temperature rating 温度等级 °C	Int. /ext. Teeth 齿	Colour 颜色
	9818120	T5	1.3	Φ1.5~45	188	4.6	85	Int.	Black
	9814087	T5	1.3	Φ1.0~45	200	4.6	125	Ext.	Black
	9818098	T5	1.3	Φ4.0~45	200	4.6	85	Ext.	Black
	9814055	M6	1.3	Φ8.0~33	140	4.5	125	Int.	Black
	9814015	T5/M5	1.2	Φ1.0~15	162	3.4	125	Ext.	Black
	9814010	T5/M6	1.2	Φ1.0~15	157	3.4	125	Ext.	Black
	9814081	T5/M6	1.2	Φ9.0~34	189	6.0	150	Int.	Gray
	9818740	M5/M6	1.3	Φ1.6~35	184	8.0	85	Ext.	Natural
	9814062	M5/M6	1.3	Φ4.0~45	235	6.3	125	Int.	Black
	9814003	T5/M6	1.2	Φ1.0~15	159	3.4	125	Ext.	Black

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度 mm	Applicable harness 捆扎范围 mm	Length 长度 mm	Width 宽度 mm	Temperature rating 温度等级 °C	Int. /ext. Teeth 齿	Colour 颜色
	9818741	T5/M6	1.3	Φ1.6~44.5	210	6.4	85	Int.	Black
	9818082	M5	1.2	Φ8.0~40	155	6.0	85	Int.	Gray
	9818083	M6	1.3	Φ8.0~40	155	6.0	85	Int.	Dark Gray
	9814000	TM5/T5	1.2	Φ1.0~15	157	3.4	125	Ext.	Black
	9818763	T6	1.3	Φ1.0~35	161	4.6	125	Ext.	Black
	9818225	T5	1.2	Φ4.0~45	200	4.6	85	Ext.	Black
	9818100	T5	1.3	Φ4.0~45	200	4.6	85	Ext.	Black
	9818751	T5	1.3	Φ4.0~45	200	4.6	125	Ext.	Black
	9814163	M6	1.7	Φ1.0~80	306	7.5	125	Ext.	Black
	9818151	M6	1.3	Φ4.0~45	200	4.6	125	Ext.	Black
	9818739	M8	1.3	Φ4.0~45	200	4.6	125	Ext.	Black
	9814141	M6	1.3	Φ80.0	200	4.6	125	Ext.	Black
	9814144	M6	1.3	Φ80.0	306	7.5	125	Int.	Black
	9814147	M6	1.3	Φ80.0	306	7.5	150	Int.	Brown
	9814142	M8	1.3	Φ80.0	306	7.5	125	Int.	Black
	9814148	M8	1.3	Φ80.0	306	7.5	150	Int.	Brown

Cable Ties with Oblong Hole

腰型孔扎带

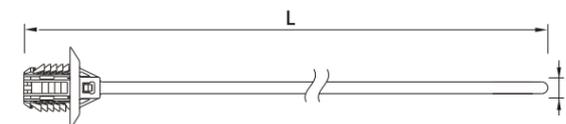

- The oblong feature is designed to fix the harness route as it is not easy to rotate after assembly
腰型设计固定后不易扭转，能固定线束走向
- The disc feature makes adjustable the pressure at different directions of the cable tie and blocks dirt and foreign materials
伞型帽设计可调节扎带各个方向的压力，减少灰尘杂物进入
- The arrow feature makes insertion easy and retention force larger
个字头设计，轻松插入保持力更强
- The arrow feature after installation could be disassembled completely and reused
个字头安装后有利于完整拆卸，二次使用
- The fir tree configuration is designed for easy lock, prevention from improper assembly, and better anti-dropping capability
杉树头设计，轻松锁紧并防止装配不到位，防脱落能力更强

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度 mm	Applicable harness 捆扎范围 mm	Length 长度 mm	Width 宽度 mm	Temperature rating 温度等级 °C	Int. /ext. Teeth 齿	Colour 颜色
	9818092	7.0*12.0	0.7~2.5	Φ2.0~38	165	6.4	85	Ext.	Gray
	9814080	7.0±0.2*12.0±0.2	0.6~3.0	Φ1.6~40	175	5.3	85	Int.	Black
	9818743	7.0±0.2*12.0±0.2	0.6~3.0	Φ1.6~40	175	5.3	125	Int.	Black
	9860136	7.0±0.2*12.0±0.2	1.9	Φ2.0~50	219	5.0	125	Ext.	Black
	9818753	7.0*12.0	0.8	Φ8.0~40	163	8.5	85	Ext.	Black
	9814160	7.0*12.0	0.6-3.2	Φ3.0~50	200±5	4.6	125	Ext.	Black
	9818780	7.0±0.2*12.0±0.2	0.6~3.0	Φ1.6~40	175	5.3	85	Int.	Black
	9818118	6.2*12.2	0.67~3.0	Φ2.0~32	156	5.0	85	Int.	Black
	9814121	6.2*12.2, 6.5*12.5, 6.5*13.0, 7.0*12.0	0.6~6.75	Φ1.0~35	172	5.0	125	Ext.	Black
	9814001	6.5*13.0	0.8~3.0	Φ1.0~15	161	3.4	125	Ext.	Black
	9818702	6.2-0.05/+0.15*12.2-0.05/+0.15	0.6~6.0	Φ1.6~35	164	4.6	125	Ext.	Black
	9860137	10.0±0.2*12.0±0.2	0.6-8.5	Φ5.0~50	225	5.0	125	Ext.	Black
	9814063	6.2*12.2	0.6~3.0	Φ1.5~40	185	4.8	125	Int.	Black
	9814009	Φ6.5*13.0	0.8~3.0	Φ1.0~15	160	3.4	125	Ext.	Black
	9814008	Φ6.5*13.0	0.8~3.0	Φ1.0~15	167	3.4	125	Ext.	Black

Fixing Clips

定位件



- It is divided into connector clip and harness clip
分为连接器定位件和绑线定位件
- The connector clip fits to the connector at one end, and is installed and fixed on the other end
连接器定位件一端适配连接器；一端安装固定
- The connector can be inserted easily by hand
可手推轻松插入连接器

- Harness clip is attached directly onto the harness
绑线定位件直接捆绑于线束上
- The adhesive tape or cable tie is required for fixing
需胶带或扎带固定
- The round head adapts to multi-angles and the oblong head prevents rotation
圆形头部可适应多角度，腰型头部可防扭转

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度 mm	Offset 偏置 mm	Length of attachment to harness 绑线长度 mm	Temperature 温度 °C	Colour 颜色
	9814358	M5x14.0	/	30	160	85	Black
	9814495	5.0x11.6/6.2x12.2	2.0	13.4/22	60	125	Black
	9818220	M6	/	36.5	60	85	Black
	9818187	M6	/	16.85	36.3	85	Black
	9814444	T5	/	39.85	60	125	Green
	9814482	T6	17.0	/	/	85	Black
	9818140	stud 5.0	/	11.2	50	125	Black
	9818138	stud 5.0x14.0	/	15	50	125	Black
	9818809	stud 5.0x16.0	/	11.5	65	125	Green
	9818810	stud 5.0x16.0	/	11.5	65	125	Black
	9818198	5.0x15.0	1.75~2.75	/	50	125	Black
	9818907	/	/	10	40	125	Black
	9814388	/	/	/	40	125	Black

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度	Offset 偏置 mm	Length of attachment to harness 绑线长度 mm	Temperature 温度 °C	Colour 颜色
	9818787	Φ5.5~6.5	0.75~1.5	/	37	125	Black
	9818205	Φ6.0~6.5	4.0	/	42.3	125	Black
	9818165	Φ6.2	0.68	/	50	125	Natural
	9814440	Hex6.35±0.2, Φ6.5±0.2	0.6~4.0	/	55	125	Black
	9818188	Φ6.5	0.56~5.1	/	36.1	125	Natural
	9818301	Φ6.5 ^{+0.05} _{-0.15}	0.6~5.1	/	36	125	Black
	9818222	Φ6.5+0.2	0.6~2.5	/	65	125	Green
	9818139	Φ6.5+0.2	0.6~3.0	13.2	40	125	Black
	9818143	Φ6.5+0.2	0.6~3.0	/	54	125	Green
	9818144	Φ6.5+0.2	0.6~3.0	/	54	125	Black
	9818146	Φ6.5+0.2	0.8~3.0	/	36	125	Black
	9814385	Φ6.5±0.4	0.75~4.0	/	56	125	Natural
	9818785	Φ6.5~7.0	0.6~4.0	/	36	125	Black
	9818786	Φ6.5~7.0	0.6~4.0	/	36	125	Natural
	9818145	Φ8.5-0.1	0.7~6.0	/	47.7	85	Gray
	9814386	Φ8.0±0.4	2.0~9.5	/	56	85	Natural

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度	Offset 偏置 mm	Length of attachment to harness 绑线长度 mm	Temperature 温度 °C	Colour 颜色
	9818130	Φ6.1~Φ6.6	Max3.8	/	67	125	Black
	9818896	Φ6.2	2.0	/	108.5	85	Gray
	9818158	Φ6.2+0.05/-0.15	0.8~1.5	/	50	85	Black
	9818804	Φ6.5, Hex6.35	0.75~2.0	/	78.1	125	Black
	9814395	Φ6.5	0.7	/	/	125	Black
	9818831	Φ6.5+0.2	0.6	/	85	125	Black
	9818782	Φ6.5+0.2	1.5	/	85	125	Black
	9818223	Φ6.5+0.2	0.6~2.5	13	35	125	Green
	9814452	Φ6.5+0.2	0.7	/	50	125	Black
	9818820	Φ6.5+0.2	0.7~1.5	/	30	125	Black
	9818781	Φ6.5+0.2	1.0~6.0	20	110	125	Black
	9818135	Φ6.5+0.2	0.7~2.5	/	40	85	Natural
	9818132	Φ6.5+0.2	0.8~1.5	12	60	125	Black
	9818190	Φ7.0	1.5~2.0	/	66.8	125	Black
	9818783	8.5±0.2x8.5±0.2	0.6~2.0	/	/	125	Black
	9818695	8.5x9.5	0.7~0.9	/	/	125	Black
	9818152	7.0x10.0	0.8~1.0	/	64	85	Black

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度	Offset 偏置 mm	Length of attachment to harness 绑线长度 mm	Temperature 温度 °C	Colour 颜色
	9806052	Φ6.3+0.2	0.7~2.5	10	39	125	Black
	9818793	Φ6.3+0.2	0.8~2.5	31	55	125	Black
	9818812	6.35+0.02 6.55+0.02	0.5~3	32	36.6	125	Natural
	9814380	Φ6.35±0.15	0.8~4.0	15.7	36.6	125	Natural
	9814359	Φ6.5±0.1	0.6~4.0	30	42	125	Black
	9814407	Φ6.5	0.8	/	/	125	Black
	9818171	Φ6.5±0.15	0.8~5.4	31.7	36.6	85	Natural
	9818142	Φ6.5+0.2	0.6~5.0	11	30	125	Natural
	9814451	Φ6.5±0.2	0.7	30	80	125	Black
	9818610	Φ6.5+0.2	0.7~1.2	44	58.8	125	Black
	9818226	Φ6.5+0.2	0.7±0.1~ 1.5±0.1	/	65	125	Black
	9818131	Φ6.5+0.2	0.7~5.1	15	40	125	Black
	9814454	Φ6.5+0.2	0.7~5.1	20	55	125	Black
	9814486	Φ6.5±0.2	0.8	15	26.9	125	Black
	9818219	Φ6.5+0.2	0.8~4.0	15	35	125	Black
	9814425	6.35	1.4	47	59	125	Black
	9818160	Φ6.5~Φ7.0	0.7~5.1	13	55	125	Black
	9818154	Φ7.0±0.2	1.0~2.0	26	60	125	Black
	9814387	Φ8.0±0.4	2.0~9.5	31.6	60	125	Natural

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度	Offset 偏置 mm	Length of attachment to harness 绑线长度 mm	Temperature 温度 °C	Colour 颜色	
	9930032	Φ6.3~7.0	0.6~3.0	15	30	125	Black	
	9930033	Φ6.3~7.0	0.6~3.0	20	30	125	Black	
	9930034	Φ6.3~7.0	0.6~3.0	25	30	125	Black	
	9930035	Φ6.3~7.0	0.6~3.0	30	30	125	Black	
	9930036	Φ6.3~7.0	0.6~3.0	15	40	125	Black	
	9930037	Φ6.3~7.0	0.6~3.0	20	40	125	Black	
	9930038	Φ6.3~7.0	0.6~3.0	25	40	125	Black	
	9930039	Φ6.3~7.0	0.6~3.0	30	40	125	Black	
	9930040	Φ6.3~7.0	0.6~3.0	15	50	125	Black	
	9930041	Φ6.3~7.0	0.6~3.0	20	50	125	Black	
	9930042	Φ6.3~7.0	0.6~3.0	25	50	125	Black	
	9930043	Φ6.3~7.0	0.6~3.0	30	50	125	Black	
	9930044	Φ6.3~7.0	0.6~3.0	15	60	125	Black	
	9930045	Φ6.3~7.0	0.6~3.0	20	60	125	Black	
	9930046	Φ6.3~7.0	0.6~3.0	25	60	125	Black	
	9930047	Φ6.3~7.0	0.6~3.0	30	60	125	Black	
		9930048	Φ6.3~7.0	0.6~6.0	15	30	125	Black
		9930049	Φ6.3~7.0	0.6~6.0	20	30	125	Black
		9930050	Φ6.3~7.0	0.6~6.0	25	30	125	Black

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度	Offset 偏置 mm	Length of attachment to harness 绑线长度 mm	Temperature 温度 °C	Colour 颜色	
	9930051	Φ6.3~7.0	0.6~6.0	30	30	125	Black	
	9930052	Φ6.3~7.0	0.6~6.0	15	40	125	Black	
	9930053	Φ6.3~7.0	0.6~6.0	20	40	125	Black	
	9930054	Φ6.3~7.0	0.6~6.0	25	40	125	Black	
	9930055	Φ6.3~7.0	0.6~6.0	30	40	125	Black	
	9930056	Φ6.3~7.0	0.6~6.0	15	50	125	Black	
	9930057	Φ6.3~7.0	0.6~6.0	20	50	125	Black	
	9930058	Φ6.3~7.0	0.6~6.0	25	50	125	Black	
	9930059	Φ6.3~7.0	0.6~6.0	30	50	125	Black	
	9930060	Φ6.3~7.0	0.6~6.0	15	60	125	Black	
	9930061	Φ6.3~7.0	0.6~6.0	20	60	125	Black	
	9930062	Φ6.3~7.0	0.6~6.0	25	60	125	Black	
	9930063	Φ6.3~7.0	0.6~6.0	30	60	125	Black	
		9930000	Φ6.5~6.7	0.8~2.5	15	30	125	Black
		9930001	Φ6.5~6.7	0.8~2.5	20	30	125	Black
		9930002	Φ6.5~6.7	0.8~2.5	25	30	125	Black
		9930003	Φ6.5~6.7	0.8~2.5	30	30	125	Black
		9930004	Φ6.5~6.7	0.8~2.5	15	40	125	Black
	9930005	Φ6.5~6.7	0.8~2.5	20	40	125	Black	

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度	Offset 偏置 mm	Length of attachment to harness 绑线长度 mm	Temperature 温度 °C	Colour 颜色
	9930006	Φ6.5~6.7	0.8~2.5	25	40	125	Black
	9930007	Φ6.5~6.7	0.8~2.5	30	40	125	Black
	9930008	Φ6.5~6.7	0.8~2.5	15	50	125	Black
	9930009	Φ6.5~6.7	0.8~2.5	20	50	125	Black
	9930010	Φ6.5~6.7	0.8~2.5	25	50	125	Black
	9930011	Φ6.5~6.7	0.8~2.5	30	50	125	Black
	9930012	Φ6.5~6.7	0.8~2.5	15	60	125	Black
	9930013	Φ6.5~6.7	0.8~2.5	20	60	125	Black
	9930014	Φ6.5~6.7	0.8~2.5	25	60	125	Black
	9930015	Φ6.5~6.7	0.8~2.5	30	60	125	Black
	9930016	Φ7.8~8.5	0.8~2.3	15	30	125	Black
	9930017	Φ7.8~8.5	0.8~2.3	20	30	125	Black
	9930018	Φ7.8~8.5	0.8~2.3	25	30	125	Black
	9930019	Φ7.8~8.5	0.8~2.3	30	30	125	Black
	9930020	Φ7.8~8.5	0.8~2.3	15	40	125	Black
9930021	Φ7.8~8.5	0.8~2.3	20	40	125	Black	
9930022	Φ7.8~8.5	0.8~2.3	25	40	125	Black	
9930023	Φ7.8~8.5	0.8~2.3	30	40	125	Black	
9930024	Φ7.8~8.5	0.8~2.3	15	50	125	Black	

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度	Offset 偏置 mm	Length of attachment to harness 绑线长度 mm	Temperature 温度 °C	Colour 颜色
	9930025	Φ7.8~8.5	0.8~2.3	20	50	125	Black
	9930026	Φ7.8~8.5	0.8~2.3	25	50	125	Black
	9930027	Φ7.8~8.5	0.8~2.3	30	50	125	Black
	9930028	Φ7.8~8.5	0.8~2.3	15	60	125	Black
	9930029	Φ7.8~8.5	0.8~2.3	20	60	125	Black
	9930030	Φ7.8~8.5	0.8~2.3	25	60	125	Black
	9930031	Φ7.8~8.5	0.8~2.3	30	60	125	Black
	9930064	Φ8.0~8.2	0.8~3.0	15	30	125	Black
	9930065	Φ8.0~8.2	0.8~3.0	20	30	125	Black
	9930066	Φ8.0~8.2	0.8~3.0	25	30	125	Black
	9930067	Φ8.0~8.2	0.8~3.0	30	30	125	Black
	9930068	Φ8.0~8.2	0.8~3.0	15	40	125	Black
	9930069	Φ8.0~8.2	0.8~3.0	20	40	125	Black
	9930070	Φ8.0~8.2	0.8~3.0	25	40	125	Black
	9930071	Φ8.0~8.2	0.8~3.0	30	40	125	Black
	9930072	Φ8.0~8.2	0.8~3.0	15	50	125	Black
	9930073	Φ8.0~8.2	0.8~3.0	20	50	125	Black
	9930074	Φ8.0~8.2	0.8~3.0	25	50	125	Black
	9930075	Φ8.0~8.2	0.8~3.0	30	50	125	Black

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度	Offset 偏置 mm	Length of attachment to harness 绑线长度 mm	Temperature 温度 °C	Colour 颜色
	9930076	Φ8.0~8.2	0.8~3.0	15	60	125	Black
	9930077	Φ8.0~8.2	0.8~3.0	20	60	125	Black
	9930078	Φ8.0~8.2	0.8~3.0	25	60	125	Black
	9930079	Φ8.0~8.2	0.8~3.0	30	60	125	Black
	9930080	Φ8.0~8.2	0.8~6.0	15	30	125	Black
	9930081	Φ8.0~8.2	0.8~6.0	20	30	125	Black
	9930082	Φ8.0~8.2	0.8~6.0	25	30	125	Black
	9930083	Φ8.0~8.2	0.8~6.0	30	30	125	Black
	9930084	Φ8.0~8.2	0.8~6.0	15	40	125	Black
	9930085	Φ8.0~8.2	0.8~6.0	20	40	125	Black
	9930086	Φ8.0~8.2	0.8~6.0	25	40	125	Black
	9930087	Φ8.0~8.2	0.8~6.0	30	40	125	Black
	9930088	Φ8.0~8.2	0.8~6.0	15	50	125	Black
	9930089	Φ8.0~8.2	0.8~6.0	20	50	125	Black
	9930090	Φ8.0~8.2	0.8~6.0	25	50	125	Black
	9930091	Φ8.0~8.2	0.8~6.0	30	50	125	Black
	9930092	Φ8.0~8.2	0.8~6.0	15	60	125	Black
	9930093	Φ8.0~8.2	0.8~6.0	20	60	125	Black
	9930094	Φ8.0~8.2	0.8~6.0	25	60	125	Black
	9930095	Φ8.0~8.2	0.8~6.0	30	60	125	Black

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度	Offset 偏置 mm	Length of attachment to harness 绑线长度 mm	Temperature 温度 °C	Colour 颜色
	9818155	6.2x12.2	0.7~4.0	/	42	125	Black
	9814439	6.2x12.2, 6.5x12.5, 6.5x13, 7x12	0.6~6.75	/	60	125	Black
	9818909	6.3+0.4x10	0.6~2.5	/	40	125	Black
	9818788	7.0±0.2x12.0±0.2	0.6~6.0	/	55	125	Black
	9814396	7.0±0.2x12.0±0.2	0.6~3.0	/	65.6	85	Black
	9818800	7.0x12.0	0.6~2.0	/	56.8	125	Black
	9818790	7.0x12.0	0.6~3.0	/	65.6	125	Black
	9818961	7.0x12.0	0.7~1.2	/	45	85	Black
	9818799	7.0x12.0	0.7~2.5	/	45	125	Black
	9818791	7.0x12.0	1.0~3.0	/	38	85	Natural
	9818795	7.0x12.0	1.5	/	38	85	Gray
	9818796	7.0x12.0	1.5	/	70	85	Gray
	9818797	7.0x12.0	1.5	/	70	85	Gray

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度	Offset 偏置 mm	Length of attachment to harness 绑线长度 mm	Temperature 温度 °C	Colour 颜色
	9818211	Φ5.4	0.5	/	/	125	Black
	9814364	Φ6.25~7.0	Max.8.0	/	/	150	Gray
	9818167	Φ6.5	1.2~2.0	/	/	125	Black
	9818275	Φ6.5	2.5~3.0	/	/	125	Black
	9814453	Φ6.5+0.2	0.7	/	/	125	Black
	9814450	Φ6.5±0.2	0.7	/	/	125	Black
	9814441	Φ6.5+0.2	0.8~2.0	/	/	125	Black
	9818207	Φ6.5+0.2	0.8~2.5	/	/	125	Black
	9814365	Φ6.5+0.2	0.8~2.5	/	/	125	Gray
	9818208	Φ6.5±0.2	0.8~6.0	/	/	125	Black
	9818137	Φ6.5+0.2	2.0~0.2	/	/	125	Black
	9818221	Φ6.5+0.2	3.0~3.4	/	/	125	Black
	9814360	Φ6.5&Φ5.0	0.56~5.1	/	/	125	Natural
	9818172	Φ6.5&Φ5.0	0.56~5.1	/	/	125	Natural
	9818958	Φ6.5&Φ5.0	0.56~5.1	/	/	125	Natural
	9818830	Φ6.5+0.2&Φ5.0	1.5	/	/	125	Black
	9814463	Φ6.5+0.2&Φ5.0	1.9±0.1	/	/	125	Black
	9814417	Φ6.5±0.4	1.0~5.0	/	/	125	Black
	9818166	Φ6.5~7.0	0.8~2.0	/	/	125	Natural

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度	Offset 偏置 mm	Length of attachment to harness 绑线长度 mm	Temperature 温度 °C	Colour 颜色
	9818177	Φ6.5~7.0	0.75~5.0	/	/	125	Black
	9818807	Φ7.0	0.6	/	/	125	Black
	9814414	Φ7.0	1.4	/	/	125	Gray
	9818212	Φ7.0	0.6~1.6	/	/	125	Natural
	9818203	Φ7.0	0.7~1.6	/	/	125	Natural
	9818191	Φ7.0	0.9~1.1	/	/	125	Black
	9814492	Φ7.0	2.0~3.0	/	/	125	Black
	9818228	Φ9.0±0.1	3.0	/	/	125	Black
	9818197	Φ10.0±0.2	5.0	/	/	150	Black
	9814357	6.2x12.2	0.5~3.0	/	/	125	Black
	9818159	6.2x12.2	0.7~2.5	/	49	125	Black
	9818156	6.2x12.2	0.7~3.0	/	/	125	Black
	9818157	6.2x12.2	0.7~4.0	/	30	125	Black
	9818162	6.5x12.2	2.5	/	/	125	Black
	9818227	6.2x12.2	2.5±0.1	/	/	125	Black
	9814470	6.5x12.8	1.5	/	/	125	Black
	9818805	Φ6.5±0.25x13±0.25	0.7~3.0	/	/	125	Black
	9818193	6.5x13.8	3.0	/	/	125	Natural
	9818784	Squarehole6.8+0.2x6.8+0.2	0.6~1.25	/	/	125	Green

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Thickness 厚度	Offset 偏置 mm	Length of attachment to harness 绑线长度 mm	Temperature 温度 °C	Colour 颜色
	9818224	Φ6.5+0.2	0.6~4.5	/	44.5	85	Natural
	9805967	Φ12.0	/	/	51	85	Black
	9818914	Φ9.5~10.0	/	/	48.7	125	Black
	9814654	51.0x24.1	1.5	/	58	85	Natural
	9818505	/	/	/	60	85	Black
	9814355	6.5+0.2x8.0+0.2	0.7~1.5	18	/	125	Black
	9818956	Φ6.5+0.2&Φ5.0+0.2	0.7	13&5	42.3	125	Black
	9814564	Φ6.5±0.25x13±0.25	1.0~3.0	/	/	125	Black
	9814565	Φ6.5±0.25x13±0.25	1.0~3.0	/	/	125	Black
	9814576	Φ6.5~6.7 Smooth tubeΦ7.0~8.0 Smooth tubeΦ15.0~16.0	0.6~1.8	/	/	125	Black
	9814577	Φ6.5~6.7 Smooth tubeΦ7.0~8.0 Smooth tubeΦ15.0~16.0 Smooth tubeΦ15.0~16.0	0.6~1.8	/	/	125	Black
	9813756	Φ6.5 & Hex6.35	1.2	/	20	125	Black
	9814150	20.0x30.0	0.6	/	60	125	Black
	9814411	13.4~13.4~13.4	/	/	/	125	Black
	9814410	13.4~13.4~13.4 2x(10.0x12.5x3.6)	/	/	/	125	Black
	9815059	13.4~13.4~13.4~13.4	/	/	/	125	Black
	9815060	13.4~13.4~13.4 2x(10.0x12.5x3.6)	1.2	/	/	125	Black
	9815061	13.4~13.4~13.4~13.4 M5	/	/	/	125	Black
	9815062	13.4~13.4~13.4~13.4	/	/	/	125	Black

Clamping Clips 紧固件



- It has an arrow or fir tree clip at one end for fixing; and clamps the smooth tube or corrugated tube on the other end
一端带个箭头或杉树头固定; 另一端固定光滑管或波纹管
- It can be fixed in the round hole or oblong hole.
可固定于圆孔或腰型孔中
- The end fixing the harness can be disassembled upon necessity
线束端固定端可随时拆卸
- The type with 2 ends fixing the harness to prevent harness from intersection or collision
两端固定线束类型, 可避免线束交叉碰撞

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Mating corrugated tube spec 对配波纹管规格 mm	Thickness 厚度 mm	Temperature 温度 °C	Colour 颜色
	9818252	Φ6.5	NW6G	4.0	85	Black
	9818255	Φ6.5	NW6G	4.0	85	Gray
	9819338	Φ6.5+0.2	NW13/UFW13	0.3~2.5	125	Black
	9818243	Φ6.5	NW17	2.0	125	Black
	9818244	Φ6.5+0.2	NW22	0.8~2.5	125	Black
	9818234	6.2x12.2, 6.5x12.5, 7.2x12, 6.5x13	10G/13G	0.6~6.75	125	Black
	9818231	Φ6.35±0.25	19G	Max12.5	85	Black
	9818253	Φ6.5	25G	4.0	125	Black
	9818235	Φ6.5~7.0	22G	Max12.5	85	Gray
	9805319	Φ6.5~6.7	NW26/A26	0.8~5.0	125	Black
	9818254	Φ6.5	6G	4.0	85	Gray
	9818236	Φ6.625±0.375	NW10G/13G	Max12.5	125	Black

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Mating corrugated tube spec 对配波纹管规格 mm	Thickness 厚度 mm	Temperature 温度 °C	Colour 颜色
	9818953	Φ6.5+0.2	NW13	1.0~6.0	125	Black
	9818954	Φ6.5+0.2	NW13	1.0~6.0	125	Black
	9818237	Φ6.5+0.2	NW4.5	1.0~6.0	125	Black
	9818240	Φ6.5+0.2	NW7.5	1.0~6.0	125	Black
	9818241	Φ6.5+0.2	NW10	1.0~6.0	125	Black
	9818242	Φ6.5+0.2	NW13	1.0~6.0	125	Black
	9818258	6.2x12.2	NW11	0.7~2.5	125	Black
	9818351	6.2x12.2	NW13	0.7~2.5	125	Black
	9818970	6.2x12.2	NW13	0.7~2.5	125	Black
	9818259	6.2x12.2	NW22	0.7~2.5	125	Black
	9805976	8.0x15.0	NW10/A8.5	2.5~3.5	125	Black
	9805320	Φ6.5±0.2	NW4.5	0.8~3.5	125	Black
	9814401	Φ6.5±0.2, 对配Φ7.1	/	0.7~3.0	125	Black
	9814403	Φ6.5 ±0.2, 对配Φ7.1	/	0.7~3.0	125	Black
	9805917	Φ6.5	NW4.5	0.7~5.1	85	Black
	9805911	Φ6.5	NW7.5	0.7~5.1	85	Black
	9805912	Φ6.5	NW8.5	0.7~5.1	85	Black
	9805913	Φ6.5	NW10	0.7~5.1	85	Black
	9805914	Φ6.5	NW13	0.7~5.1	85	Black
	9805925	Φ6.5	NW17	0.7~5.1	85	Black
	9805916	Φ6.5	NW22	0.7~5.1	85	Black
	9805310	Φ6.5~6.7	NW4.5/A4.5	0.8~5.0	125	Black
	9805311	Φ6.5~6.7	NW7.5/A6	0.8~5.0	125	Black

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Mating corrugated tube spec 对配波纹管规格 mm	Thickness 厚度 mm	Temperature 温度 °C	Colour 颜色
	9805312	Φ6.5~6.7	NW8.5	0.8~5.0	125	Black
	9805313	Φ6.5~6.7	NW10/A8.5	0.8~5.0	125	Black
	9805314	Φ6.5~6.7	NW13/A11	0.8~5.0	125	Black
	9805961	Φ6.5~6.7	NW4.5/A4.5	0.5~3.0	125	Black
	9805960	Φ6.5~6.7	NW4.5/A4.5	0.8~6.0	125	Black
	9805980	Φ6.5~6.7	NW10/A8.5	0.8~5.0	125	Black
	9805985	Φ6.5~6.7	NW10/A8.5	0.8~5.0	125	Black
	9805981	6.2x12.2	NW13/A11	0.8~5.0	125	Black
	9805962	Φ6.5~6.7	NW23S	0.8~3.0	125	Black
	9805956	Φ6.5~6.7	NW23S	0.5~3.0	125	Black
	9805900	Φ6.5~6.7	NW23S	0.8~6.0	125	Black
	9805978	Φ6.5~6.7	NW23S	0.8~5.0	125	Black
		9805965	Φ6.5~6.7	NW4.5/A4.5	0.8~5.0	125
9805977		Φ6.5~6.7	NW7.5/A6	0.5~3.0	125	Black
9805963		Φ6.5~6.7	NW7.5/A6	0.8~6.0	125	Black
9805975		Φ6.5~6.7	NW7.5/A6	0.8~5.0	125	Black
	9805979	Φ8.0~8.2	NW7.5/A6	0.8~5.0	125	Black
	9805318	Φ5.0~Φ5.2	NW4.5/A4.5	0.8~5.0	125	Black
	9805309	Φ6.5~Φ6.7	NW22/A19	0.8~5.0	125	Black
	9805423	Φ6.5~Φ6.7	NW4.5/A4.5	0.8~5.0	150	BAY
	9805490	Φ6.5~Φ6.7	NW14	0.8~5.0	150	BAY
	9805491	Φ8.0~Φ8.2	NW14	0.8~5.0	125	Black
	9805401	Φ8.0~Φ8.2	NW4.5/A4.5	0.8~5.0	125	Black

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Mating corrugated tube spec 对配波纹管规格 mm	Thickness 厚度 mm	Temperature 温度 ℃	Colour 颜色
	9805424	Φ6.5-6.7	NW7.5/A6	0.8~5.0	150	BAY
	9805957	Φ6.5+0.2	NW13/A11	/	125	Black
	9805418	6.0x12.0	NW4.5/A8.5(NW9)	0.5~3.0	125	Black
	8713195	8.8x11.0	NW4.5	2.0~3.2	125	Black
	8713196	8.8x11.0	NW8.5	2.0~3.2	125	Black
	8713190	8.8x11.0	NW10	2.0~3.2	125	Black
	8713189	8.8x11.0	NW13	2.0~3.2	125	Black
	8713188	8.8x11.0	NW17	2.0~3.2	125	Black
	8713187	8.8x11.0	NW22	2.0~3.2	125	Black
	9818959	Φ6.5+0.2/-0.15	Φ6~Φ12	0.5~2.0	85	Black
	9815127	Φ6.5±0.2	/	1.0~3.0	125	Black
	9815128	Φ6.5±0.2	/	1.0~3.0	125	Black
	9815129	Φ6.5±0.2	/	1.0~3.0	125	Black
	9818792	7.0x12.0	Φ13~25	0.6~2.6	85	Natural
	9818238	Mating smooth tube: Φ8.0~Φ9.0	NW7.5	/	85	Black
	9818239	Mating smooth tube: Φ15.0~Φ16.0	NW7.5	/	85	Black

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Mating corrugated tube spec 对配波纹管规格 mm	Thickness 厚度 mm	Temperature 温度 ℃	Colour 颜色
	9818261	Mating smooth tube: Φ19.0~Φ24.5	NW4.5	/	85	Black
	9818262	Mating smooth tube: Φ11.0~Φ13.0	NW4.5	/	85	Black
	9818901	Mating smooth tube: Φ15.0~Φ16.0	NW4.5	/	85	Black
	9818903	Mating smooth tube: Φ11.0~Φ13.0	NW13	/	85	Black
	9818904	Mating smooth tube: Φ18.0~Φ20.0	NW13	/	85	Black
	9818920	Mating smooth tube: Φ18.0~20.0 and 22.0	/	/	125	Black
	9818905	Mating smooth tube: Φ20.0~Φ24.5	NW17	/	125	Black
	9818906	Mating smooth tube: Φ16.0~Φ18.0	NW17	/	85	Black
	9818277	Mating smooth tube: Φ25.0~Φ27.0	NW7.5	/	125	Black
	9818276	Mating smooth tube: Φ10.0	13G	/	125	Black
	9818266	Mating smooth tube: Φ22.0	NW17	/	125	Black
	9818279	Mating smooth tube: Φ25.1~25.9	NW17	/	125	Black
	9818246	Mating weld bolt: Φ5.0x9.0, Φ5.0x14.2, Φ5.0x16.0	NW7.5	/	125	Black
	9818247	Mating weld bolt: Φ5.0x9.0, Φ5.0x14.2, Φ5.0x16.0	NW10	/	125	Black
	9818245	Mating weld bolt: Φ5.0x9.0, Φ5.0x14.0, Φ5.0x16.0	NW13	/	125	Black
	9818248	Mating weld bolt: Φ5.0x9.0, Φ5.0x14.2, Φ5.0x16.0	NW17	/	125	Black
	9818249	Mating weld bolt: Φ5.0x9.0, Φ5.0x14.2, Φ5.0x16.0	NW22	/	125	Black
	9814562	M6	NW17	/	125	Black

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Mating corrugated tube spec 对配波纹管规格 mm	Thickness 厚度 mm	Temperature 温度 °C	Colour 颜色
	9818919	7.0x12.0	NW26	1.8~2.2	125	Black
	9818250	12.0x3.0/16.0x2.0	NW13	/	125	Black
	9818251	12.0x3.0/16.0x2.0	NW17	/	125	Black
	9818274	φ9.0x14.0	NW17UFW, NW22UFW	2.0	125	Black
	9818278	φ9.0x14.0	NW22UFW, NW26UFW, NW29UFW	1.8	125	Black
	9818263	Mating smooth tube: φ8.0~φ9.0 and φ 8.0~φ9.0	/	/	125	Black
	9818264	Mating smooth tube: 13.0~14.0 and 14.0~15.0	/	/	125	Black
	9818265	Mating smooth tube: φ8.0~φ9.0 and φ13.0~φ14.0	/	/	125	Black
	9805982	Mating smooth tube: φ10.0/8.0	/	/	85	Black
	9805966	φ11.0+0.2	NW10/17	4.5~5.0	125	Black
	9805915	φ11.0+0.2	NW13~14	4.5~5.0	125	Black
	8211326	M8	NW26~NW29	/	125	Black
	9814561	M6	NW26	/	125	Black
	1C0971003B	/	NW/UFW7.5	/	85	Black
	8213055	φ15.0	NW22	4.0~4.5	85	Black
	8213127	φ15.0	NW22	4.0~4.5	85	Black
	9819339	/	/	/	125	Black
	9814504	SLOT 1: 6.0-0.35 SLOT 2: 6.0-0.5 SLOT 3: 4.0-0.35 SLOT 4: 6.0-1.5 SLOT 5: 6.0	/	/	125	Natural

Photo 示意图	Schlemmer No. 诗兰姆号	Diameter of the hole 孔径 mm	Mating corrugated tube spec 对配波纹管规格 mm	Thickness 厚度 mm	Temperature 温度 °C	Colour 颜色
	9814505	SLOT 1: 4.0-6.0 SLOT 2: 10.0 SLOT 3: 4.0-6.0 SLOT 4: 4.0 SLOT 5: 2.5	/	/	125	Black
	9805984	/	D16 4xD6	/	125	Black
	9805983	/	D20 4xD6	/	125	Black
	9818256	φ6.5±0.2	φ25, φ14	/	125	Black